

Neets Control - SieRRa, EU



SO ADVANCED - AND YET SO SIMPLE

The world's smallest touch panel control system

FUNCTION

Easy and clever

Press ONE button to start up your presentation. With a control system this easy, anyone can start up a presentation without any introduction.

Trash your many remotes and simply use the SieRRa control system for:

- DVD
- TV
- Amplifiers
- Projectors
- Screen
- VCR
- Digital tuner
- Media centres
- Etc.

The SieRRa control system has eight freely configurable buttons, which give visual feed back in nine different colours.



DESIGN



Customize your SieRRa control system

Professional companies often place great emphasis on design and presentation. You can customize your SieRRa control system by choosing your keyboard in polar white or anthracite and decide on one of our many different frames.

You can even use your logo and company font and this way the SieRRa control system matches your company design completely.

You do not need a rack anymore, because the SieRRa control system is so small. Even the LAN connection fits in the back of the SieRRa control system, and this way your meeting room can maintain its original design without the disturbance of technical devices.

TOUCH PANEL

An extra dimension

The SieRRa control system has a built-in web server, which means you can use a secondary touch panel to get more functions.

To get an unlimited number of buttons you can use for instance a smart phone, PC or touch panel (e.g. Android tablet, Ipad, Ipod touch).

The SieRRa control system uses standard LAN/WIFI and current web browser technology.



EXTRA FEATURES

For your convenience

- Level button with turn function and level indication
- Real Time Clock: Pre-set functions and commands for your meeting room in your week calendar
- Manage the screen, lights, blinds etc. in the meeting room
- Multiply your button panel by adding extra panels
- Use the web page "Roomhunter" to get an overview of all meeting rooms - book a room and start up your AV equipment from your computer



TECHNICAL SPECIFICATIONS



Easy to programme

USB front programming makes programming easy and quick. Just remove the front glass and you are ready to programme. Only a screwdriver is needed.

Easy to install

The SieRRa control system fits into a standard one gang EU and UK back box and is fitted with phoenix connectors, making the installation as simple as possible.

Easy to use

The SieRRa control system has eight freely configurable buttons as a standard.

8 BUTTONS

8 MULTI COLOUR LED

1 PCS. RS-232 (TX1, RX1):

BAUD: 1200-115200

DATA BIT: 7/8

PARITY: NONE, EVEN, ODD

STOP BIT: 1/ 1,5/2

2 PCS. RS-232 (TX)/ IR (X2): RS-232 (TX):

BAUD: 1200-115200

PARITY: NONE, EVEN, ODD

STOP BIT: 1/1,5/2

IR:

TRANSMIT 381 HZ-500 KHZ

DEVICES: 4

1 PCS. LAN

DEVICES: 5

3 PCS. I/O: INPUT:

SENCE LOW <1 VDC

SENCE HIGH >4 VDC

OUTPUT:

TYPE: OPEN DRAIN

MAX VOLTAGE: 24 VDC

MAX CURRENT: 0,5 A

NEETS EXPANSION BUS (NEB):

12 V (0.3A) OUT

NEB INFO

SIZE (WITHOUT FRAME):

H: 55 MM

W: 55 MM

D: 24 MM

INCLUDED IN BOX:

12V PSU

POWER:

VOLTAGE: 110-230 V

CONFORMITY:


APPROVAL:

CE

EN 55022

EN 55024

How **does it** connect?

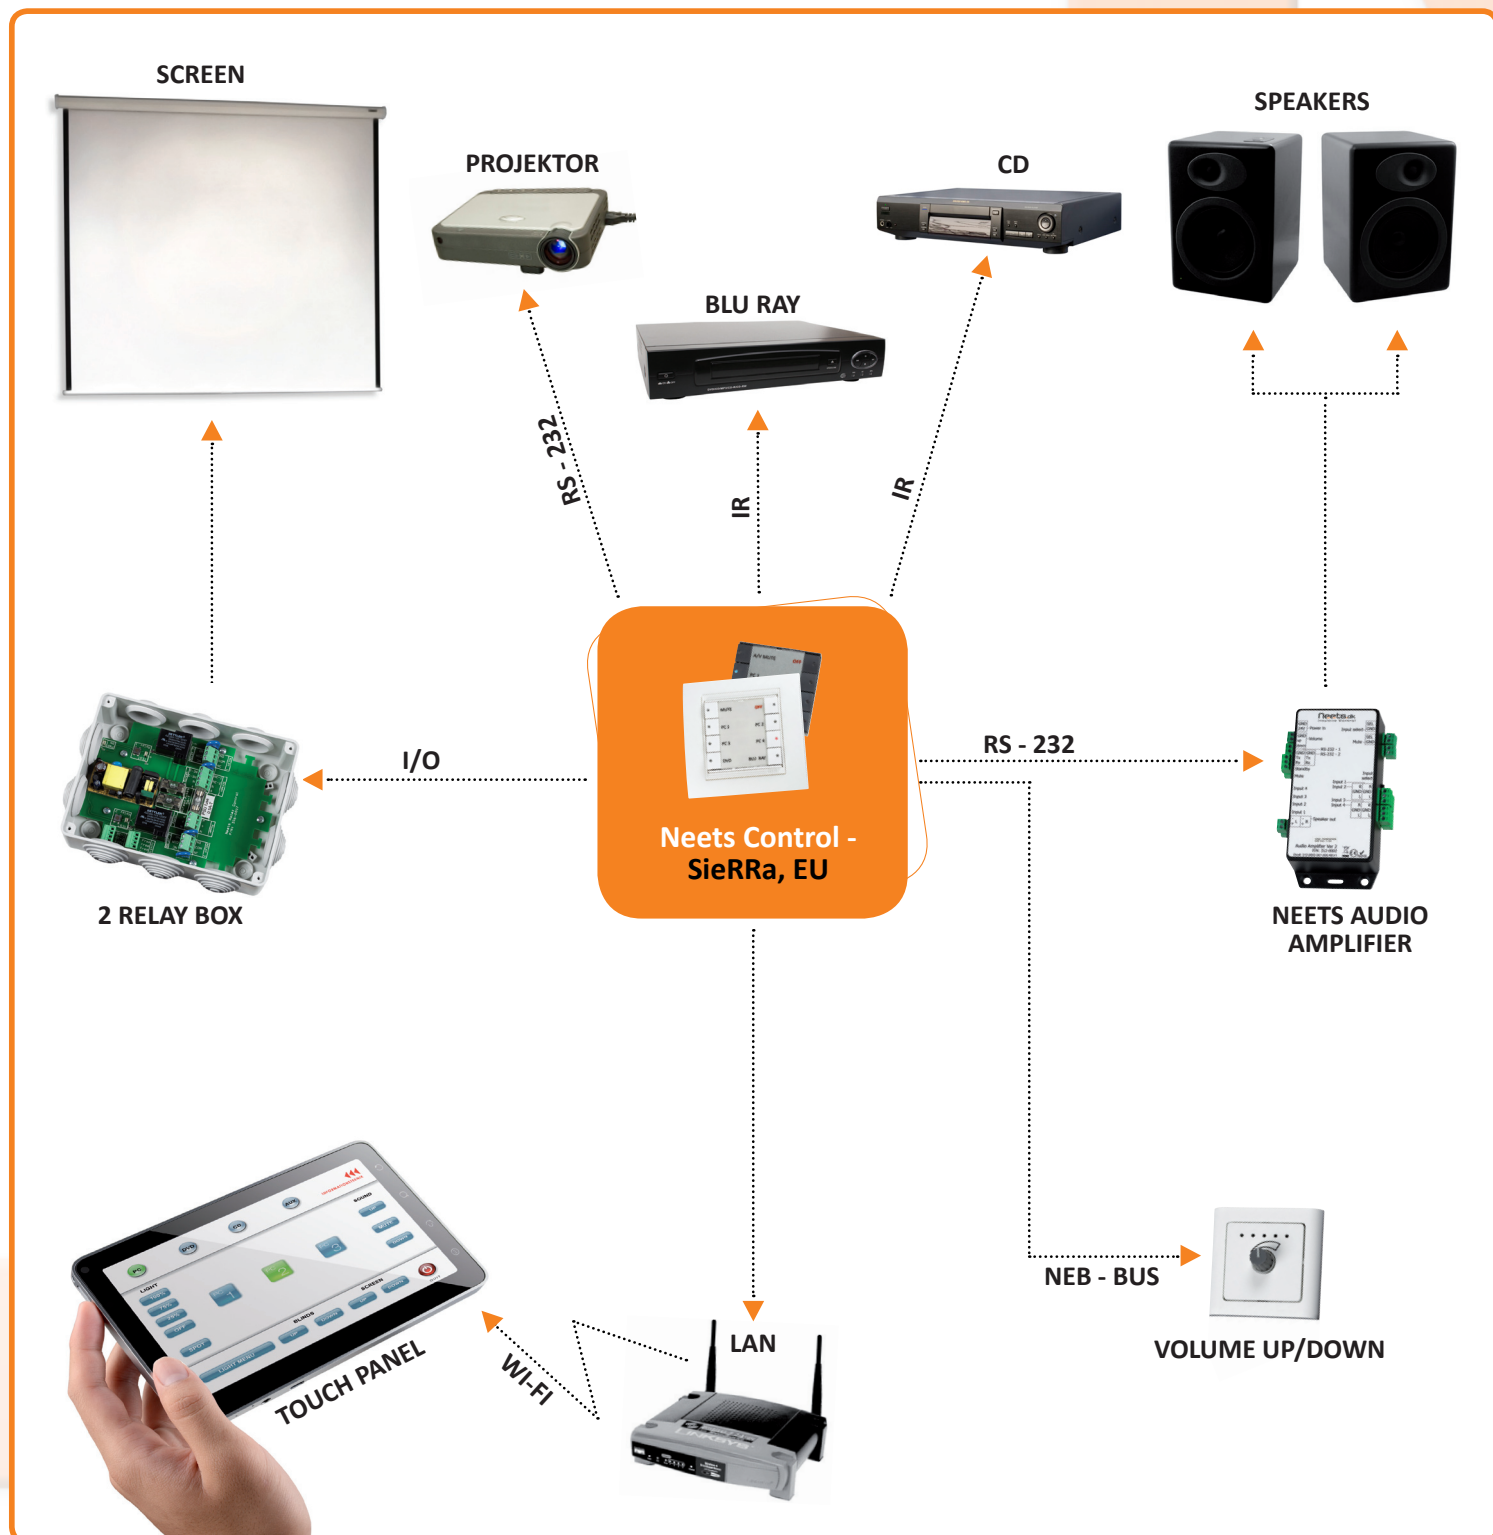

We simplify complex AV equipment

Neets

Torvet 4 • 8700 Horsens • Denmark • Phone: +45 75 666 099 • E-mail: sales@Neets.dk • www.Neets.dk